

B25E

CONTAINER TRUCK

6x6

Articulated Dump Trucks

Stage II Certified



- Gross Power: 205 kW (275 hp)
- Operating Weight: 42 910 kg (94 600 lbs)

BELL

B25E Container Truck Articulated Dump Truck




STANDARD EQUIPMENT

- Full drive line protection
- Oscillation lock
- Twistlocks to retain std ISO 20 ft container
- Forward facing headboard and container guides on rear corners
- 55° Tip angle
- Front and rear worklights

BODY		OPERATING WEIGHTS			
Capacity	kg (lb)	UNLADEN	kg (lb)	LADEN	kg (lb)
Gross	24 000 (52 911)	Front	9 740 (21 473)	Front	12 480 (27 514)
		Middle	4 605 (10 152)	Middle	15 235 (33 587)
		Rear	4 565 (10 064)	Rear	15 195 (33 499)
		Total	18 910 (41 689)	Total	42 910 (94 600)

The compilation of standard and optional equipment may vary by market region. Please check with your local distributor.

Dimensions

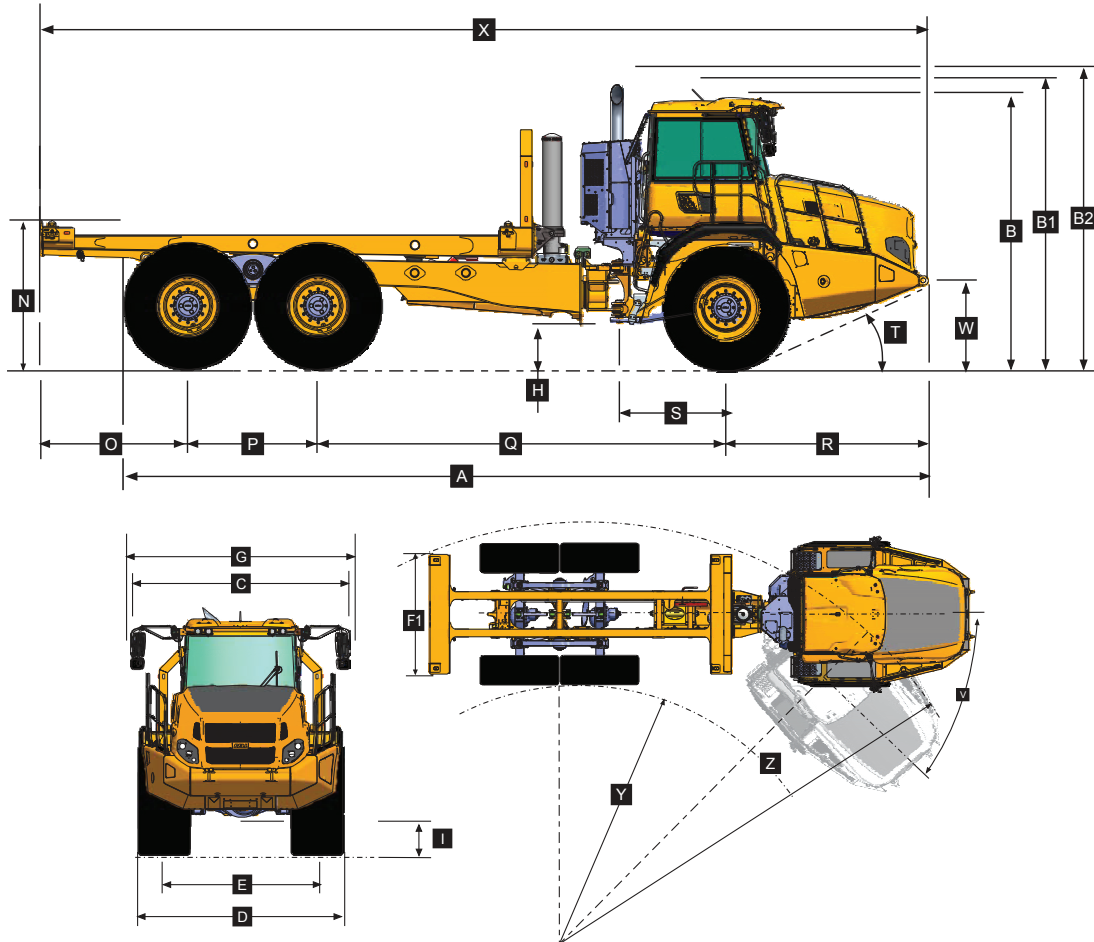

Machine Dimensions

A	Length - Transport Position	10 020 mm	K	Ground Clearance - Under Run Bar	N/A mm
B	Height - Transport Position	3 661 mm	N	Height of the Bed	1 665 mm
B1	Height - Rotating Beacon	3 426 mm	O	Rear Axle Centre to Bin Rear	1 872 mm
B2	Height - Load Light	3 747 mm	P	Mid Axle Centre to Rear Axle Centre	1 670 mm
C	Width over Mudguards	2 985 mm	Q	Mid Axle Centre to Front Axle Centre	5 225 mm
D	Width over Tyres - 23.5R25	2 940 mm	R	Front Axle Centre to Machine Front	2 602 mm
D1	Width over Tyres - 750/65 R25	2 998 mm	S	Front Axle Centre to Artic Centre	1 362 mm
E	Tyre Track Width - 23.5R25	2 356 mm	T	Approach Angle	25 °
E1	Tyre Track Width - 750/65 R25	2 260 mm	V	Maximum Articulation Angle	45 °
F1	Width over Container Deck	2 496 mm	W	Front Tie Down Height	1 075 mm
G	Width over Mirrors - Operating Position	3 260 mm	X	Machine Lifting Centres	11 370 mm
H	Ground Clearance - Artic	407 mm	Y	Inner Turning Circle Radius - 23.5R25	5 125 mm
I	Ground Clearance - Front Axle	488 mm	Z	Outer Turning Circle Radius - 23.5R25	9 520 mm
J	Ground Clearance - Bin Fully Tipped	670 mm			

All dimensions are shown in millimetres, unless otherwise stated between brackets. Under our policy of continuous improvement, we reserve the right to change technical data and design without prior notice. Photographs featured in this brochure may include optional equipment.

BELL INTERNATIONAL: Tel: +27 (0)35-907 9431

E-mail: marketing@bellequipment.com

Web: www.bellequipment.com

Tel: +61 (0)8-9355-2442

Tel: +33 (0)5-55-89-23-56

Tel: +49 (0)6631 / 91-13-0

Tel: +7-495-287-80-02

Tel: +27 (0)11-928-9700

Tel: (704) 655 2802

Tel: +44 (0)1283-712862

**Strong Reliable Machines
Strong Reliable Support**

