



E is for evolution

Your business is our business. Bell Articulated Dump Trucks haul more, for longer at the lowest cost-per-ton to deliver more on your profit margins.

As a global leader in Articulated Dump Trucks, Bell Equipment brings you the world class E-series range. The evolutionary E-series is packed with class leading features that deliver production boosting payloads, lower daily operating costs, superior ride quality and uncompromised safety standards.

Bell E-series ADTs will give your business the competitive edge you need.

- Extensive use of high-strength, lightweight materials give our trucks the best payload-to-mass ratios and hauling efficiencies in each class.
- With their oscillating frame and high-flotation tyres, Bell trucks won't leave you stuck in muddy, rutted or hilly terrain.
- The redesigned, soundsuppressed cab features fatigue-beating controls, an advanced diagnostic monitor with B-drive and a sealed switch module for convenient, fingertip operation of machine functions.
- Fuel-efficient emission-rated engines deliver clean power without compromise in all conditions. Leading-edge emissions technology ensures rapid engine response and dependable cold-start performance.



The E-series range takes ADT functionality to new industry standards, with customer-focused enhancements delivering the highest level of automated operator and machine protection available.

I hrough substantial investments in research and development and employing industry-leading technology, advancements in the key areas of performance and fuel efficiency help you to move more material at lower operating costs with even less impact on the environment.

Specifications	B40E	B45E	B50E
Gross power	380 kW (510 hp)	390 kW (523 hp)	430 kW (577 hp)
Operating mass			
Empty	34 596 kg (76 284 lb)	35 479 kg (78 231 lb)	38 287 kg (84 423 lb)
Loaded	73 596 kg (162 279 lb)	76 479 kg (168 636 lb)	83 687 kg (184 530 lb)
Rated payload	39 000 kg (85 980 lb)	41 000 kg (90 390 lb)	45 400 kg (100 090 lb)
2:1 heaped capacity	24 m³ (31 yd³)	25 m³ (33 yd³)	27,5 m³ (36 yd³)



Building on pedigree

Building on from the proven
D-series platform, Bell Equipment's
evolutionary approach to design
delivers optimised power-to-weight
ratios and legendary fuel efficiency.



- High-travel suspension keeps all tyres in constant contact with the ground, for optimum traction.
- Automatic Traction Control (ATC) is achieved with speed sensors providing feedback to the truck's on-board computer, which controls the differential lock activation as required. Coupled with, best in class rear suspension travel, this results in unparalleled off-road ability.
- Automatic retardation slows the truck when the operator backs off the accelerator pedal providing more confidence on steep grades.
- An industry leading, fully automatic seven-speed planetary transmission with torque converter lock-up maximises fuel efficiency.

- Electronic common rail fuel system provides high injection pressures even at low engine speed for improved coldstarting ability, low-speed response and reduced emissions.
- Bell ADTs have the best approach angle to attack steep terrain owing to careful engine packaging and the front chairs design.
- Improved payloads, faster haul cycles and industry leading fuel economy all help you move more material at a lower-cost-per-tonne than the competitors.
- Optimised payload-to-weight ratios decrease your cost-pertonne meaning more of your fuel cost is spent moving the material rather than running the machine.



Planetary powershift transmission optimises shift points to match conditions and vehicle weight while protecting the transmission from operator error and abuse. Allison FuelSense® calibration optimises production and fuel burn.



The transfer case inter-axle differential delivers equal torque to each axle when traction is favourable. When conditions deteriorate, the diff-lock automatically engages to deliver torque to the tyres that can best use it.



High-strength steel and widely spaced taper roller bearings in the articulation area enhance long-term durability.



A tailgate is available as an option for better material retention. The tailgate opens as the bin is raised for dumping. Unlike chains, the spring steel straps in a Bell ADT bin maintain a positive seal throughout the haul ensuring minimal material is lost.

Our innovative front and rear comfort ride suspension options are offered to even further enhance ride quality and ensure minimal whole body vibration exposure.

Productivity increases through reduced cycle times, and reduced haul road maintenance are even further benefits of these extremely successful systems. Experienced ADT operators who have driven trucks installed with these systems have come away amazed by the comfort of the machine, as well as the confidence that the adaptive front suspension engenders.



Uncompromised durability

Built smarter, to work harder.

Bell ADTs offer optimised machine weights so you spend more time and money on moving

material than on running the machine.


With decades of ADT experience, the Bell E-series articulated hauler is designed and manufactured using purpose built, reliable Bell components best suited for the toughest of conditions.

The central oscillation joint, high suspension travel on all axles, and balanced weight distribution provide the agility and ability to navigate hostile terrain.



The high-strength steel chassis delivers strength and rigidity without excess weight.

- Fully enclosed, flooded, dual circuit wet disc brakes offer superior braking performance and extended service life essential for wet and muddy conditions. Oil-immersed wet-disc brakes are virtually maintenance-free and feature a high flow circulation system with cooling and filtration.
- Viscous, electronically controlled, direct-drive engine fans provide effective cooling and the best efficiency.
- Class leading engine braking, coupled with automated brake retardation, provides superior braking power whilst brake retardation occurs at pressures low enough to ensure no contact between wet brake plates resulting in zero wear.

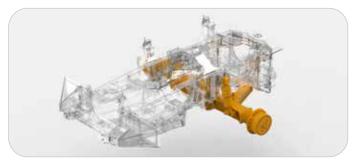

For comfortable productivity, the A-frame suspension system coupled with hydropneumatic suspension struts reduce the discomfort of lateral vibration often experienced with off-road conditions. A superior suspension seat provides additional isolation for the operator.



Rough terrain demands tough suspensions. Heavy-duty components absorb shocks and come back for more. You get best-in-class suspension travel and ground clearance, too.



Other uptime-boosting features include world class on-board diagnostics with live stream functionality, solid-state sealed switches and satellite fleet management system.

High-strength welded-alloy steel chassis and reinforced articulation joints, offer superior strength and durability with optimised weight for class leading power-to-weight ratio. Lower machine mass reduces powertrain and structural stress.

Operate with ease

Using the latest in automotive technology and state-of-the-art tooling, the E-series takes operator experience to new heights.

Climb into the cab of a Bell ADT and you will feel right at home. Its quiet, spacious interior, ergonomically positioned operator station and climate-controlled cabin is loaded with productivity boosting comfort and convenience features that minimise operator fatigue and enhance the operator's experience.

Modern flowing lines, in keeping with current styling trends on road vehicles, offer unsurpassed levels of visibility.

From the state-of-the-art 10" full colour screen, automotive mouse interface and sealed switch module to air suspension seat, tilt/telescoping steering wheel and optional CD player with high-output speakers, the E-series provides everything your operators need to perform at their best.

- The standard soundsuppression package significantly reduces noise levels and operator fatigue.
- A fully adjustable airsuspension seat with variable damping, auto height adjust according to operator weight, pneumatic lumbar support and multipoint harness for classleading comfort and safety.
- New machine styling and cabin design improvements, which include full glass access door and high visibility mirror package, provide exceptional all-round visibility.

- The adaptive transmission control adjusts clutch engagement to ensure smooth, consistent shifts throughout the life of the truck.
- A purpose designed HVAC climate control system with automotive-style louvres keeps the glass clear and the cab comfortable.
- You won't find retarder pedals or levers in a Bell truck. Retarder aggressiveness is simply set on the switch pad. Everything else is automatic.



Easy-to-understand instruments and intuitive controls wrap around the operator so they're easier to view and operate.



A user friendly, multi-language, 10" colour display unit offers vital operating information, safety warnings, detailed diagnostic readings and dump body function settings.



The Bell automotive sealed display controller, B-drive, enables easy navigation of the CDU for access of machine information and adjustment of machine settings.



Convenient sealed switch module provides fingertip control of numerous productivity enhancing functions including: Keyless Start, I-Tip, Dump Body Upper Limit, Soft Stop/Hard Stop Selection, Retarder Aggressiveness and Speed Control.





Safety, our business too

By listening to users and delivering on expectations in an ever changing workplace, we provide a truck that leads in application safety with numerous groundbreaking innovations.

Independent features such as Keyless Start, Hill Assist, Bin Tip Prevention, Auto Park Application (APA), Standard Turbo Spin Protection and On-Board Weighing (OBW) are still standard on the E-series.

For improved safety and productivity, the E-series has Automatic Traction Control (ATC).

- Full handrails (to ISO 2876) can be installed to offer improved safety when performing engine checks.
- The park brake automatically applies when neutral is selected and it is not possible to engage neutral at speed. Torque dependent park brake release (Hill Assist) ensures no roll back on slopes.
- All trucks can be set up to automatically sound the horn when starting or switching between forward and reverse.
- Best-in-class retarder and engine braking automatically applies when the operator lifts his foot off the accelerator. Retarder aggressiveness can be simply adjusted on the sealed switch module ensuring maximum descent control for all conditions.
- Multiple geofencing in challenging site conditions ensures safe machine operation, such as downhill speed control, geofence speed limits and bin restrictions.



Our quiet operator cabins are ROPS/FOPS certified with an air suspension operator seat. The trainer seat has a retractable lap belt while the operator seat has a standard 3 point seat belt. Both have automatically locking retractors.



An optional integrated reverse camera and high visibility mirrors ensure superior all round visibility.



Keyless start, driver identity and access codes ensure no unauthorised operation of your equipment.



The exclusive on-board weighing presents the operator with real time information on the payload while the machine is being loaded. A 'speed restriction' mode can also be activated if the machine is significantly overloaded.



The incorporation of a pitch and roll sensor in the vehicle prevents bin operation if the truck is in an unsafe position.



Both operator or site selectable maximum speed control allows the vehicle to automatically decelerate and apply the retarder to prevent onsite speeding.



Maximise your uptime

The E-series is loaded with features that make it as easy to maintain as it is to operate. Spend less time and expense getting ready for work and more time getting work done.

Easy-to-reach dipsticks and grouped service points make quick work of the daily routine. Quick-change filters, extended engine and hydraulic oil-service intervals lower daily operating costs and provide superior machine uptime.

The industry leading, 10" colour monitor offers on-board machine diagnostics as well as automated daily service functionality, coupled with diagnostic test ports, for ease of troubleshooting and informing maintenance decisions on site.





If something goes wrong, the diagnostic monitor provides service codes and supporting info to help diagnose the problem.




The cab can be tilted in minutes without special tools, for convenient service access to drivetrain components.



An in-cab load centre simplifies fuse replacement. Fewer relays, connectors and harnesses mean higher reliability.



The remote transmission filter option makes transmission filter replacement an even faster and cleaner task.

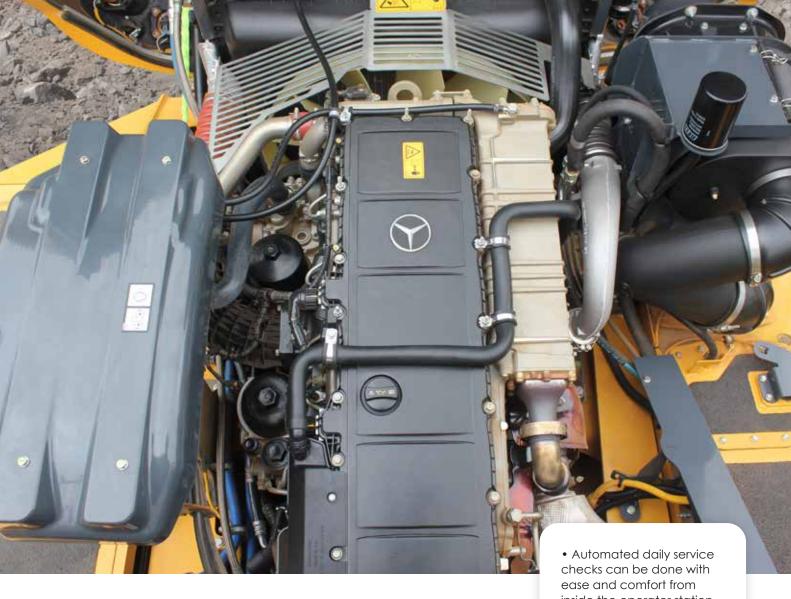




See-through fluid reservoirs and sight gauges let you check fluid levels at a glance.



Easily accessible test ports allow technicians to troubleshoot problems more quickly.




The centralised lube bank places difficult-to-reach grease points within reach.



The convenient and easy to understand RSG decal details daily checks and actions (eg: greasing).

- checks can be done with ease and comfort from inside the operator station using the 10" colour LCD monitor and sealed display controller.
- The load-sensing hydraulic system was designed with simplicity in mind, while maintaining efficiency. Fewer components for improved reliability and serviceability.
- Extended engine transmission and hydraulic oil-change for increased uptime and lower operating cost.
- Available environmental drains allow quick, no-spill changes.
- Your Bell Service Centre has the parts and backup you need to stay productive and offers a wide variety of preventative maintenance and support programmes to help you control costs.

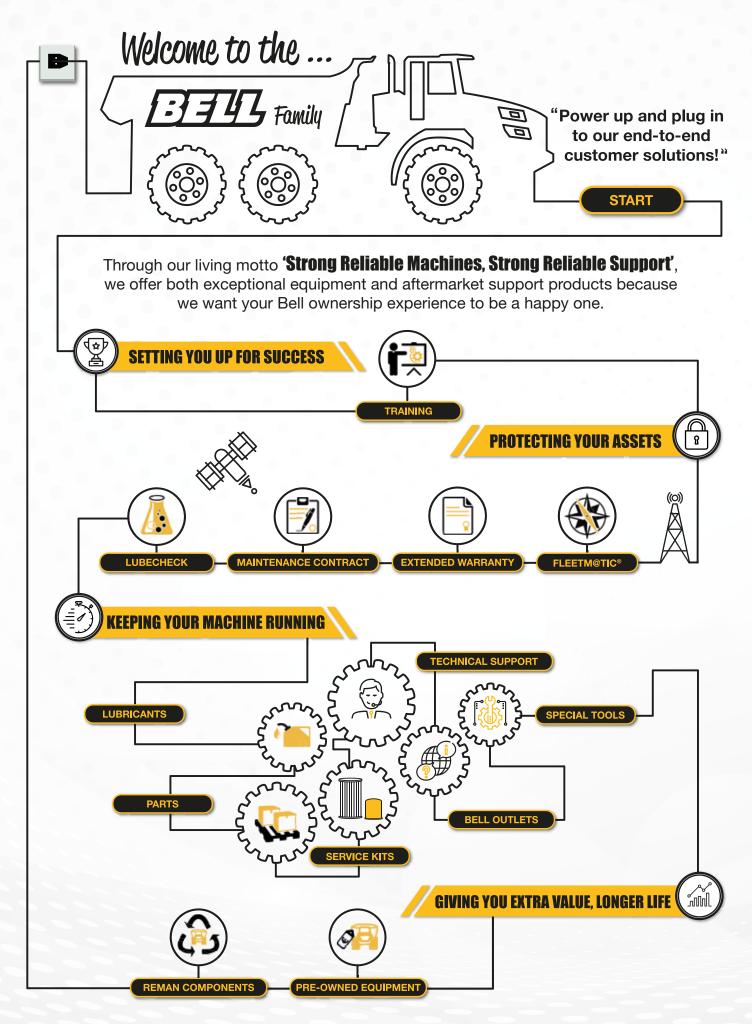

SUPPORTING YOU EVERY STEP OF YOUR BELL OWNERSHIP EXPERIENCE



Cutting edge technology, helping you run your fleet smarter. Providing accurate, up-to-date operational data, production data and diagnostic data.

The key to a productive and profitable fleet, lies in the ability to monitor and manage your machines and operators efficiently. Machine operational data is processed and compiled into useful production and performance statistics, accessible via the Bell Fleetm@tic® website. These reports are also automated and emailed directly to you. The two monitoring packages that we have available, are:

- **The Classic Package** supplies you with good enough information for you to have a very good understanding of how your machine is operating for each shift that it runs. This package comes standard with the machine for 2 years.
- The Premium Package is focused on customers who need to have extremely detailed information of the machine's operation. For this package we offer similar information to that of the Classic Package but for each individual laden unladen cycle. In addition, live tracking is available on the Fleetm@tic® website on a per minute basis.

Fleetm@tic®:

- Maximise productivity
- Generate machine utilisation reports
- Identify operator training requirements
- Pro-active maintenance planning
- Implement safety features

- Receive machine fault codes as well as suggested trouble shooting procedures
- Protect investments
- · Receive real time geospatial data



B40E Articulated Dump Truck



FNGINE

Manufacturer Mercedes Benz (MTU)

Model OM471LA (MTU 6R 1300)

Configuration
Inline 6, turbocharged and intercooled

Gross Power 380 kW (510 hp) @ 1 700 rpm

Net Power 359 kW (481 hp) @ 1 700 rpm

Gross Torque 2 380 Nm (1 755 lbft) @ 1 300 rpm

Displacement 12,8 litres (781 cu.in)

Auxiliary Brake
Jacobs Engine Brake®

Fuel Tank Capacity 533 litres (140.8 US gal)

Certification
OM471LA (MTU 6R 1300) is
EU Stage IIIA / EPA Tier 3
emission level equivalent

TRANSMISSION

Manufacturer Allison

Model 4700 ORS

Configuration
Fully automatic planetary
transmission

Layout Engine mounted

Gear Layout
Constant meshing planetary
gears, clutch operated

Gears 7 Forward, 1 reverse

Clutch Type
Hydraulically operated multi-

Control Type Electronic

Torque Control Hydrodynamic with lock-up in all gears

TRANSFER CASE

Manufacturer Kessler

Series W2400

Layout Remote mounted

Gear Layout

Three in-line helical gears

Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.

AXLES

Manufacturer Bell

Model 30T

Differential

High input controlled traction differential with spiral bevel gears

Final Drive
Outboard heavy duty planetary
on all axles

BRAKING SYSTEM

Service Brake
Dual circuit, full hydraulic
actuation wet disc brakes on
front and middle axles. Wet
brake oil is circulated through a
filtration and cooling system.

Maximum brake force: 305 kN (68 567 lbf)

Park & Emergency
Spring applied, air released driveline mounted disc

Maximum brake force: 218 kN (49 008 lbf)

Auxiliary Brake
Automatic engine valve brake.
Automatic retardation through
electronic activation of wet
brake system.

Total Retardation Power Continuous: 442 kW (593 hp) Maximum: 854 kW (1 145 hp)

WHEELS

Type Radial Earthmover

Tyre 29.5 R 25 (875/65 R 29 optional)

FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydropneumatic suspension struts Option: Electronically controlled adaptive suspension with ride height adjustment

REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks

Option: Comfort Ride suspension walking beams, with two-stage sandwich block

HYDRAULIC SYSTEM

Full load sensing system serving the prioritised steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

Pump Type Variable displacement load sensing piston

Flow 330 L/min (87 gal/min)

Pressure 315 bar (4 569 psi)

Filter 5 microns

STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump

Lock to lock turns 5

Steering Angle 42°

DUMPING SYSTEM

Two double-acting, single stage, dump cylinders

Raise Time

Lowering Time 6 seconds

Tipping Angle70 deg standard, or any lower angle programmable

PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions

System Pressure 810 kPa (117 psi)

ELECTRICAL SYSTEM

Voltage 24 V

Battery Type
Two AGM (Absorption Glass
Mat) type

Battery Capacity 2 X 75 Ah

Alternator Rating 28V 80A

MAX. VEHICLE SPEED 4 km/h 2,5 mph 9 km/h 2nd 6 mph 3rd 17 km/h 11 mph 4th 23 km/h 14 mph 21 mph 5th 33 km/h 6th 44 km/h 27,3 mph 7th 51 km/h 32 mph 7 km/h 4 mph


CAB

ROPS/FOPS certified 76 dBA internal sound level measured according to ISO 6396

Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE*		LOAD CAP	ACITY	OPTION WEIGHTS	
UNLADEN	kg (lb)	LAD	EN	BODY	m³ (yd³)		kg (lb)
Front	16 816 (37 079)	(No sinkage/Total Co	ntact Area Method)	Struck Capacity	19 (25)	Bin liner	1 369 (3 018)
Middle	8 997 (19 837)	29.5 R 25	kPa (Psi)	SAE 2:1 Capacity	24 (31)	Tailgate	984 (2 169)
Rear	8 784 (19 368)	Front	310 (45)	SAE 1:1 Capacity	28,5 (37)	875/65 R29	
Total	34 596 (76 284)	Mid & Rear	341 (50)	SAE 2:1 Capacity		(per vehicle) Add	1 182 (2 606)
LADEN				with Tailgate	24,5 (32)		
Front	21 691 (47 828)	875/65 R29	kPa (Psi)			EXTRA WHEELSET	
Middle	26 059 (57 460)	Front	293 (43)	Rated Payload	39 000 kg	29.5 R 25	800 (1 764)
Rear	25 846 (56 990)	Mid & Rear	329 (48)		(85 980 lb)	875/65 R29	1 024 (2 258)
Total	73 596 (162 279)						

^{* 29.5}R25 Groundpressures calculated with Michelin XADN+ Tyre. 875/65R29 Groundpressures calculated with Michelin XAD65-1 Tyre.

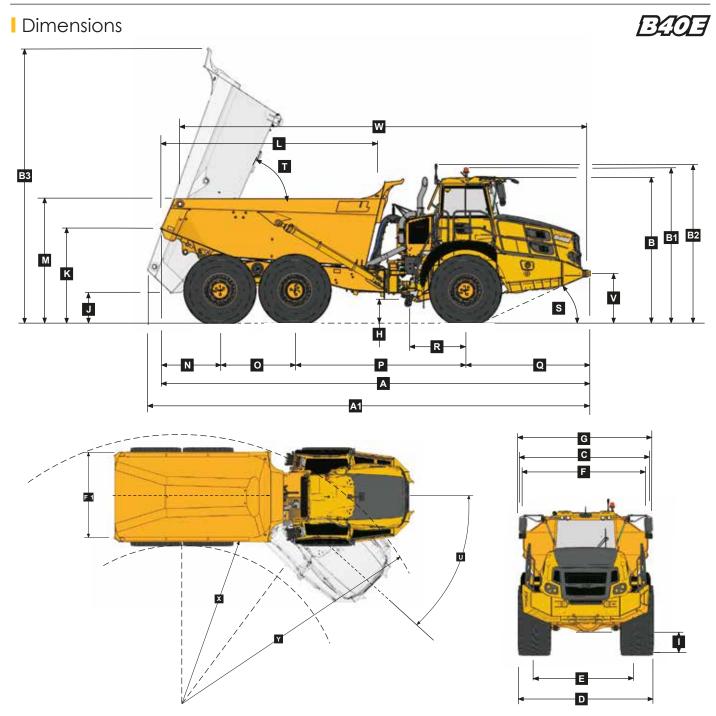


						_						
N	\sim		a	100		\mathbf{n}	100	-	100	io	100	
IV	ıu	C	ш	и	_	יט		ı	112	ı	11	2

Α	Length - Transport Position with Tailgate	11 197 mm (36 ft. 9 in.)
Α	Length - Transport Position w/o Tailgate	11 186 mm (36 ft. 8 in.)
A1	Length - Bin Fully Tipped	11 742 mm (38 ft. 6 in.)
В	Height - Transport Position	3 804 mm (12 ft. 6 in.)
B1	Height - Rotating Beacon	4 040 mm (13 ft. 3 in.)
B2	Height - Load Light	4 129 mm (13 ft. 7 in.)
В3	Bin Height - Fully Tipped	7 316 mm (24 ft.)
C	Width over Mudguards	3 495 mm (11 ft. 6 in.)
D	Width over Tyres - 875/65 R29	3 656 mm (12 ft.)
D	Width over Tyres - 29.5R25	3 487 mm (11 ft. 5 in.)
Ε	Tyre Track Width - 875/65 R29	2 773 mm (9 ft. 1 in.)
Ε	Tyre Track Width - 29.5R25	2 725 mm (8 ft. 11 in.)
F	Width over Bin	3 372 mm (11 ft.)
F1	Width over Tailgate	3 662 mm (12 ft.)
G	Width over Mirrors - Operating Position	3 614 mm (11 ft. 10 in.)
Н	Ground Clearance - Artic	545 mm (21.46 in.)
1	Ground Clearance - Front Axle	545 mm (21.46 in.)
J	Ground Clearance - Bin Fully Tipped	876 mm (34.5 in.)

K	Bin Lip Height - Transport Position	2 519 mm	(8 ft. 3 in.)
L	Bin Length	5 742 mm	(18 ft. 10 in.)
М	Load over Height	3 271 mm	(10 ft. 9 in.)
N	Rear Axle Centre to Bin Rear	1 543 mm	(5 ft.)
0	Mid Axle Centre to Rear Axle Centre	1 950 mm	(6 ft. 5 in.)
Р	Mid Axle Centre to Front Axle Centre	4 438 mm	(14 ft. 7 in.)
Q	Front Axle Centre to Machine Front	3 255 mm	(10 ft. 8 in.)
R	Front Axle Centre to Artic Centre	1 558 mm	(5 ft. 1 in.)
S	Approach Angle	24 °	
T	Maximum Bin Tip Angle	70 °	
U	Maximum Articulation Angle	42 °	
V	Front Tie Down Height	1 265 mm	(4 ft. 2 in.)
W	Machine Lifting Centres	10 594 mm	(34 ft. 9 in.)
Χ	Inner Turning Circle Radius - 875/65 R29	4 782 mm	(15 ft. 8 in.)
Χ	Inner Turning Circle Radius - 29.5R25	4 866 mm	
Υ	Outer Turning Circle Radius - 875/65 R29	9 320 mm	(30 ft. 7 in.)
Υ	Outer Turning Circle Radius - 29.5R25	9 235 mm	(30 ft. 4 in.)


Gradeability/Rimpull

- 1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
- 2. From this intersection, move straight right across charts until line intersects rimpull curve.
- 3. Read down from this point to determine maximum speed attained at that tractive resistance.

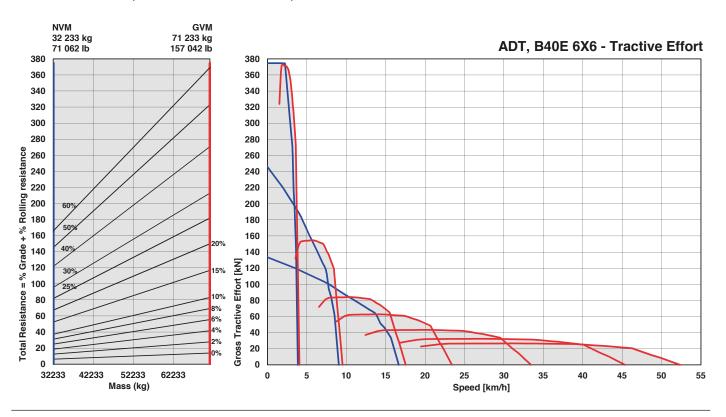

Retardation

- 1. Determine retardation force required by finding intersection of vehicle mass line.
- 2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
- 3. Read down from this point to determine maximum speed.

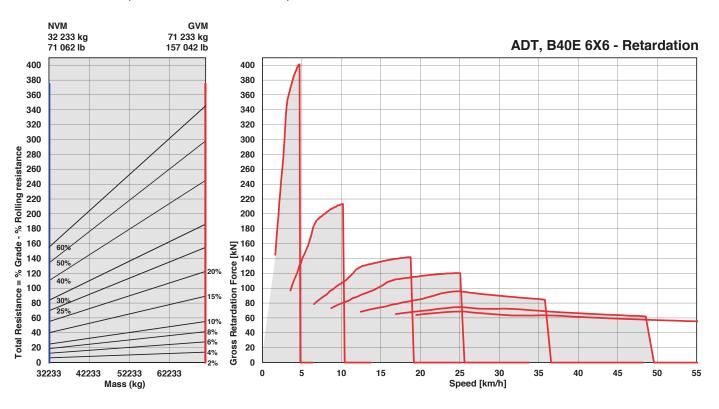

B45E Articulated Dump Truck



FNGINE

Manufacturer Mercedes Benz (MTU)

Model OM471LA (MTU 6R 1300)

Configuration
Inline 6, turbocharged and intercooled

Gross Power 390 kW (523 hp) @ 1 700 rpm

Net Power 369 kW (495 hp) @ 1 700 rpm

Gross Torque 2 460 Nm (1 814 lbft) @ 1 300 rpm

Displacement 12,8 litres (781 cu.in)

Auxiliary Brake
Jacobs Engine Brake®

Fuel Tank Capacity 533 litres (140.8 US gal)

Certification
OM471LA (MTU 6R 1300) is EU
Stage IIIA / EPA Tier 3 emission
level equivalent

TRANSMISSION

Manufacturer Allison

Model 4700 ORS

Configuration
Fully automatic planetary
transmission

Layout Engine mounted

Gear Layout
Constant meshing planetary
gears, clutch operated

Gears 7 Forward, 1 reverse

Clutch Type Hydraulically operated multi-

Control Type Electronic

Torque Control Hydrodynamic with lock-up in all gears

TRANSFER CASE

Manufacturer Kessler

Model W2400

Layout Remote mounted

Gear Layout

Three in-line helical gears

Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.

AXLES

Manufacturer Bell

Model 30T

Differential

High input controlled traction differential with spiral bevel aears

Final Drive
Outboard heavy duty planetary
on all axles

BRAKING SYSTEM

Service Brake
Dual circuit, full hydraulic
actuation wet disc brakes on
front and middle axles. Wet
brake oil is circulated through a
filtration and cooling system.

Maximum brake force: 330 kN (74 187 lbf)

Park & Emergency
Spring applied, air released
driveline mounted disc

Maximum brake force: 218 kN (49 008 lbf)

Auxiliary Brake
Automatic engine valve brake.
Automatic retardation through
electronic activation of wet
brake system.

Total Retardation Power Continuous: 442 kW (593 hp) Maximum: 854 kW (1 145 hp)

WHEELS

Type Radial Earthmover

Tyre 29.5 R 25 (875/65 R 29 optional)

FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydropneumatic suspension struts Option: Electronically controlled adaptive suspension with ride height adjustment

REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks

Option: Comfort Ride suspension walking beams, with two-stage sandwich block

HYDRAULIC SYSTEM

Full load sensing system serving the prioritised steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

Pump Type Variable displacement load sensing piston

Flow 330 L/min (87 gal/min)

Pressure 315 bar (4 569 psi)

Filter 5 microns

STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump

Lock to lock turns 5

Steering Angle 42°

DUMPING SYSTEM

Two double-acting, single stage, dump cylinders

Raise Time
11 seconds

Lowering Time 6 seconds

Tipping Angle70 deg standard, or any lower angle programmable

PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions

System Pressure 810 kPa (117 psi)

ELECTRICAL SYSTEM

Voltage 24 V

Battery Type Two AGM (Absorption Glass Mat) type

Battery Capacity 2 X 75 Ah

Alternator Rating 28V 80A

MAX. VEHICLE SPEED							
1st	4 km/h	2,5 mph					
2nd	9 km/h	6 mph					
3rd	17 km/h	11 mph					
4th	23 km/h	14 mph					
5th	33 km/h	21 mph					
6th	44 km/h	27,3 mph					
7th	51 km/h	32 mph					
R	7 km/h	4 mph					


CAB

ROPS/FOPS certified 76 dBA internal sound level measured according to ISO 6396

Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE*		LOAD CAP	ACITY	OPTION WEIGHTS	
UNLADEN	kg (lb)	LAD	EN	BODY	m³ (yd³)		kg (lb)
Front	17 614 (38 838)	(No sinkage/Total Co	ontact Area Method)	Struck Capacity	19,5 (25,5)	Bin liner	1 404 (3 095)
Middle	9 177 (20 236)	29.5 R 25	kPa (Psi)	SAE 2:1 Capacity	25 (33)	Tailgate	1 013 (2 233)
Rear	8 688 (19 157)	Front	321 (47)	SAE 1:1 Capacity	29,5 (38)	875/65 R29	
Total	35 479 (78 231)	Mid & Rear	370 (54)	SAE 2:1 Capacity		(per vehicle) Add	1 182 (2 606)
LADEN				with Tailgate	26 (34)		
Front	22 739 (50 139)	875/65 R29	kPa (Psi)			EXTRA WHEELSET	
Middle	27 115 (59 788)	Front	294 (43)	Rated Payload	41 000 kg	29.5 R 25	800 (1 764)
Rear	26 626 (58 710)	Mid & Rear	331 (48)		(90 390 lb)	875/65 R29	1 024 (2 258)
Total	76 479 (168 636)						

^{* 29.5}R25 Groundpressures calculated with Michelin XADN+ Tyre. 875/65R29 Groundpressures calculated with Michelin XAD65-1 Tyre.

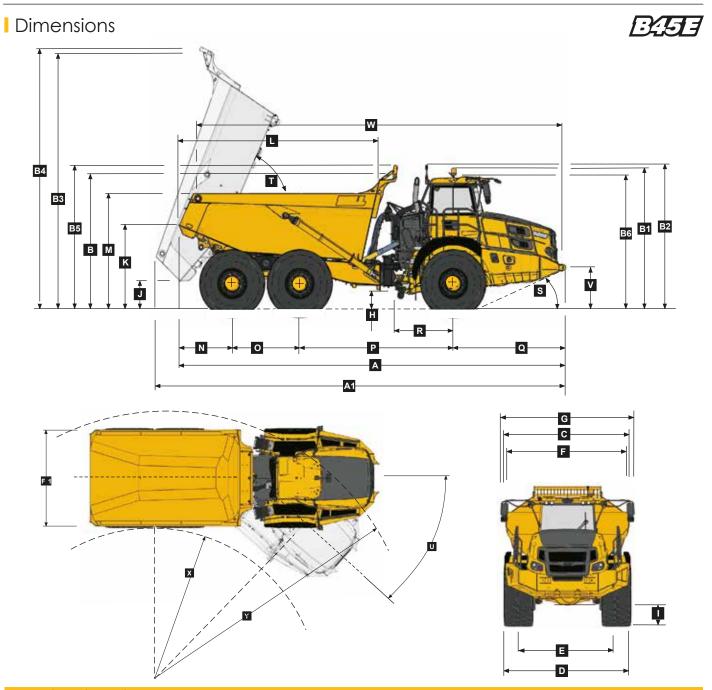


Machine Dimensions

IVI	achine Dimensions		
Α	Length - Transport Position with Tailgate	11 184 mm	(36 ft. 8 in.)
Α	Length - Transport Position w/o Tailgate		(36 ft. 8 in.)
A1	Length - Bin Fully Tipped	11 778 mm	(38 ft. 8 in.)
В	Height - Transport Position w/o Rock Guard	3 802 mm	(12 ft. 6 in.)
В	Height - Transport Position with Rock Guard	3 844 mm	(12 ft. 7 in.)
B1	Height - Rotating Beacon	4 038 mm	(13 ft. 3 in.)
B2	Height - Load Light	4 127 mm	(13 ft. 6 in.)
В3	Bin Height - Fully Tipped w/o Rock Guard	7 340 mm	(24 ft. 1 in.)
B4	Bin Height - Fully Tipped with Rock Guard	7 448 mm	(24 ft. 5 in.)
B5	Height - Rock Guard Operating Position	4 123 mm	(13 ft. 6 in.)
В6	Height - Cab	3 802 mm	(12 ft. 6 in.)
C	Width over Mudguards	3 495 mm	(11 ft. 6 in.)
D	Width over Tyres - 875/65 R29	3 656 mm	(12 ft.)
D	Width over Tyres - 29.5R25	3 487 mm	(11 ft. 5 in.)
Е	Tyre Track Width - 875/65 R29	2 773 mm	(9 ft. 1 in.)
E	Tyre Track Width - 29.5R25	2 725 mm	(8 ft. 11 in.)
F	Width over Bin	3 448 mm	(11 ft. 4 in.)
F1	Width over Tailgate	3 738 mm	(12 ft. 3 in.)
G	Width over Mirrors - Operating Position	4 027 mm	(13 ft. 3 in.)
Н	Ground Clearance - Artic	545 mm	(21.46 in.)

I	Ground Clearance - Front Axle	543 mm	(21.34 in.)
J	Ground Clearance - Bin Fully Tipped	880 mm	(34.65 in.)
K	Bin Lip Height - Transport Position	2 521 mm	(8 ft. 3 in.)
L	Bin Length	5 753 mm	(18 ft. 10in.)
M	Load over Height	3 316 mm	(10 ft. 11 in.)
N	Rear Axle Centre to Bin Rear	1 540 mm	(5 ft.)
0	Mid Axle Centre to Rear Axle Centre	1 950 mm	(6 ft. 5 in.)
Р	Mid Axle Centre to Front Axle Centre	4 438 mm	(14 ft. 7 in.)
Q	Front Axle Centre to Machine Front	3 256 mm	(10 ft. 8 in.)
R	Front Axle Centre to Artic Centre	1 558 mm	(5 ft. 1 in.)
S	Approach Angle	24°	
T	Maximum Bin Tip Angle	70°	
U	Maximum Articulation Angle	42 °	
V	Front Tie Down Height	1 262 mm	(4 ft. 2 in.)
W	Machine Lifting Centres	10 569 mm	(34 ft. 8 in.)
Χ	Inner Turning Circle Radius - 875/65 R29	4 782 mm	(15 ft. 8 in.)
Χ	Inner Turning Circle Radius - 29.5R25	4 866 mm	(16 ft.)
Υ	Outer Turning Circle Radius - 875/65 R29		(30 ft. 7 in.)
Υ	Outer Turning Circle Radius - 29.5R25	9 235 mm	(30 ft. 4 in.)


| Gradeability/Rimpull

- 1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
- 2. From this intersection, move straight right across charts until line intersects rimpull curve.
- 3. Read down from this point to determine maximum speed attained at that tractive resistance.

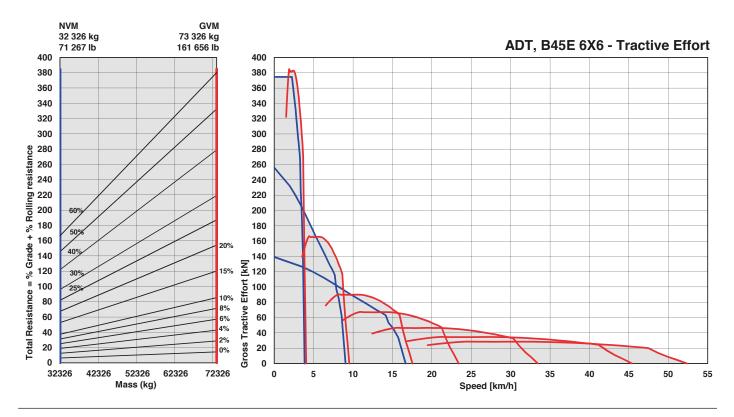

Retardation

- 1. Determine retardation force required by finding intersection of vehicle mass line.
- 2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
- 3. Read down from this point to determine maximum speed.

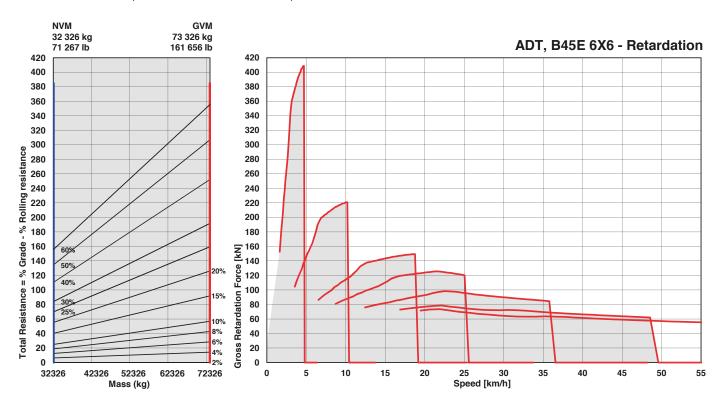

B50E Articulated Dump Truck



FNGINE

Manufacturer Mercedes Benz (MTU)

Model OM473LA (MTU 6R 1500)

Configuration
Inline 6, turbocharged and intercooled

Gross Power 430 kW (577 hp) @ 1 700 rpm

Net Power 405 kW (543 hp) @ 1 700 rpm

Gross Torque 2 750 Nm (2 028 lbft) @ 1 300 rpm

Displacement 15,6 litres (952 cu.in)

Auxiliary Brake
Jacobs Engine Brake®

Fuel Tank Capacity 630 litres (166 US gal)

Certification
OM473LA (MTU 6R 1500) is
EU Stage IIIA / EPA Tier 3
emission level equivalent

TRANSMISSION

Manufacturer Allison

Model 4800 ORS

Configuration
Fully automatic planetary
transmission

Layout Engine mounted

Gear Layout
Constant meshing planetary
gears, clutch operated

Gears 7 Forward, 1 reverse

Clutch Type Hydraulically operated multi-

Control Type Electronic

Torque Control Hydrodynamic with lock-up in all gears

TRANSFER CASE

Manufacturer Kessler Series

W2400

Layout Remote mounted

Gear Layout

Three in-line helical gears

Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.

AXLES

Manufacturer Bell

Model 30T

Differential

High input controlled traction differential with spiral bevel gears

Final Drive
Outboard heavy duty planetary
on all axles

BRAKING SYSTEM

Service Brake
Dual circuit, full hydraulic
actuation wet disc brakes on
front, middle and rear axles. Wet
brake oil is circulated through a
filtration and cooling system.

Maximum brake force: 458 kN (102 962 lbf)

Park & Emergency Spring applied, air released driveline mounted disc

Maximum brake force: 215,5 kN (48 446 lbf)

Auxiliary Brake
Automatic engine valve brake.
Automatic retardation through
electronic activation of wet
brake system.

Total Retardation Power Continuous: 546 kW (732 hp) Maximum: 963 kW (1 291 hp)

WHEELS

Type Radial Earthmover

Tyre 875/65 R 29 (29.5 R 25 optional)

FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts. Suspension is electronically controlled adaptive suspension with ride height adjustment.

REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks.

Option: Comfort Ride suspension walking beams, with two-stage sandwich block.

HYDRAULIC SYSTEM

Full load sensing system serving the prioritised steering, body tipping, suspension and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

Pump Type Variable displacement load sensing piston

Flow 330 L/min (87 gal/min)

Pressure 315 bar (4 569 psi)

Filter 5 microns

STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump

Lock to lock turns 4,9

Steering Angle 42°

DUMPING SYSTEM

Two double-acting, single stage, dump cylinders

Raise Time 11,5 seconds

Lowering Time 6 seconds

Tipping Angle70 deg standard, or any lower angle programmable

PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions

System Pressure 810 kPa (117 psi)

ELECTRICAL SYSTEM

Voltage 24 V

Battery Type Two AGM (Absorption Glass Mat) type

Battery Capacity 2 X 75 Ah

Alternator Rating 28V 80A

MAX	. VEHICLE SP	EED
1st	4 km/h	2,5 mph
2nd	9 km/h	6 mph
3rd	17 km/h	11 mph
4th	23 km/h	14 mph
5th	33 km/h	21 mph
6th	44 km/h	27,3 mph
7th	51 km/h	32 mph
R	7 km/h	4 mph

CAB

ROPS/FOPS certified 77 dBA internal sound level measured according to ISO 6396


Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE*		LOAD CAP	ACITY	OPTION WEIGHTS	
UNLADEN	kg (lb)	LAD	EN	BODY	m³ (yd³)		kg (lb)
Front	18 313 (40 381)	(No sinkage/Total Co	ontact Area Method)	Struck Capacity	21,5 (28)	Bin liner	1 495 (3 296)
Middle	10 039 (22 137)	875/65 R29	kPa (Psi)	SAE 2:1 Capacity	27,5 (36)	Tailgate	1 117 (2 463)
Rear	9 934 (21 905)	Front	296 (43)	SAE 1:1 Capacity	33 (43)	29.5 R 25	
Total	38 287 (84 423)	Mid & Rear	366 (53)	SAE 2:1 Capacity		(per vehicle) Minus	1 182 (2 606)
LADEN				with Tailgate	29 (38)		
Front	24 034 (52 994)	29.5 R 25	kPa (Psi)			EXTRA WHEELSET	
Middle	29 879 (65 884)	Front	326 (47)	Rated Payload	45 400 kg	29.5 R 25	800 (1 764)
Rear	29 774 (65 652)	Mid & Rear	395 (57)		(100 090 lb)	875/65 R29	1 024 (2 258)
Total	83 687 (184 530)						

^{* 29.5}R25 Groundpressures calculated with Michelin XADN+ Tyre. 875/65 R29 Groundpressures calculated with Michelin XAD65-1 Tyre.

Dimensions



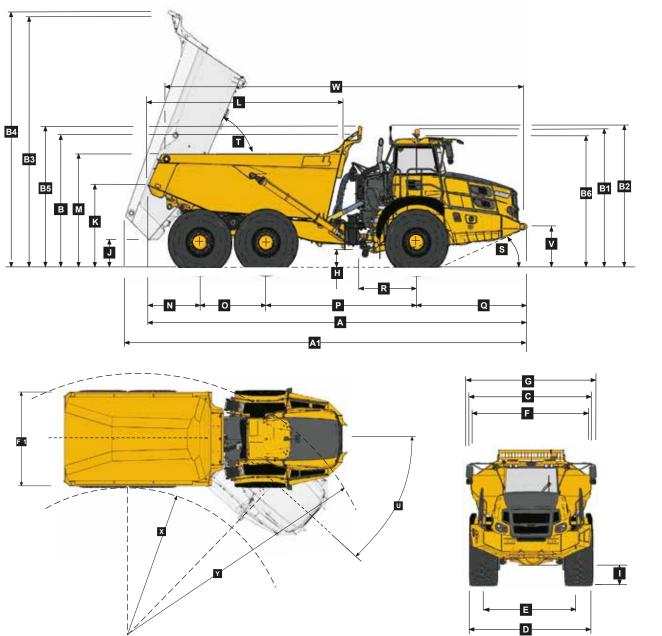


Machine Dimensions

Α	Length - Transport Position with Tailgate	11 272 mm	(37 ft.)
Α	Length - Transport Position w/o Tailgate	11 272 mm	(37 ft.)
A1	Length - Bin Fully Tipped	11 916 mm	(39 ft. 1 in.)
В	Height - Transport Position w/o Rock Guard	3 822 mm	(12 ft. 6 in.)
В	Height - Transport Position with Rock Guard	3 870 mm	(12 ft. 8 in.)
B1	Height - Rotating Beacon	4 050 mm	(13 ft. 3 in.)
B2	Height - Load Light	4 141 mm	(13 ft. 7 in.)
В3	Bin Height - Fully Tipped w/o Rock Guard	7 325 mm	(24 ft.)
B4	Bin Height - Fully Tipped with Rock Guard	7 430 mm	(24 ft. 5 in.)
B5	Height - Rock Guard Operating Position	4 148 mm	(13 ft. 7 in.)
В6	Height - Cab	3 813 mm	(12 ft. 6 in.)
C	Width over Mudguards	3 790 mm	(12 ft. 5 in.)
D	Width over Tyres - 875/65 R29	3 832 mm	(12 ft. 7 in.)
D	Width over Tyres - 29.5R25	3 714 mm	(12 ft. 2 in.)
Е	Tyre Track Width - 875/65 R29	2 949 mm	(9 ft. 8 in.)
Е	Tyre Track Width - 29.5R25	2 952 mm	(9 ft. 8 in.)
F	Width over Bin	3 735 mm	(12 ft. 3 in.)
F1	Width over Tailgate	4 057 mm	(13 ft. 4 in.)
G	Width over Mirrors - Operating Position	4 027 mm	(13 ft. 3 in.)
Н	Ground Clearance - Artic	558 mm	(21.97 in.)

ī	Ground Clearance - Front Axle	555 mm (21.85 in.)
J	Ground Clearance - Bin Fully Tipped	907 mm (35.71 in.)
K	Bin Lip Height - Transport Position	2 542 mm (8 ft. 4 in.)
L	Bin Length	5 714 mm (18 ft. 9 in.)
M	Load over Height	3 390 mm (11 ft. 1 in.)
Ν	Rear Axle Centre to Bin Rear	1 533 mm (5 ft.)
0	Mid Axle Centre to Rear Axle Centre	1 950 mm (6 ft. 5 in.)
Р	Mid Axle Centre to Front Axle Centre	4 438 mm (14 ft. 7 in.)
Q	Front Axle Centre to Machine Front	3 351 mm (11 ft.)
R	Front Axle Centre to Artic Centre	1 558 mm (5 ft. 1 in.)
S	Approach Angle	23 °
T	Maximum Bin Tip Angle	70 °
U	Maximum Articulation Angle	42 °
V	Front Tie Down Height	1 269 mm (4 ft. 2 in.)
W	Machine Lifting Centres	10 632 mm (34 ft. 11 in.)
Χ	Inner Turning Circle Radius - 875/65 R29	4 694 mm (15 ft. 5 in.)
Χ	Inner Turning Circle Radius - 29.5R25	4 753 mm (15 ft. 7 in.)
Υ	Outer Turning Circle Radius - 875/65 R29	9 408 mm (30 ft. 10 in.)
Υ	Outer Turning Circle Radius - 29.5R25	9 349 mm (30 ft. 8 in.)


| Gradeability/Rimpull

- 1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
- 2. From this intersection, move straight right across charts until line intersects rimpull curve.
- 3. Read down from this point to determine maximum speed attained at that tractive resistance.

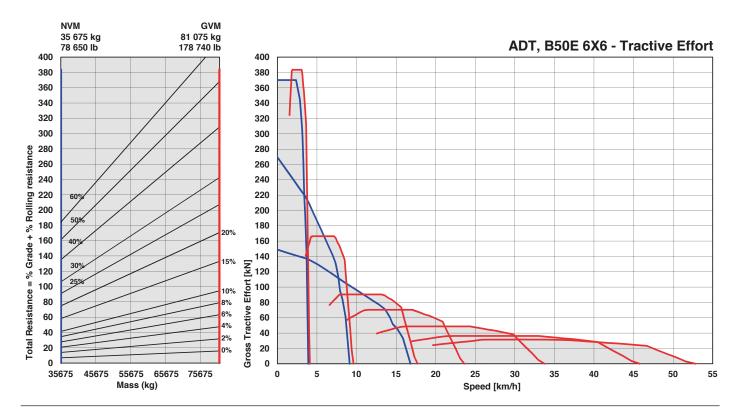

Retardation

- 1. Determine retardation force required by finding intersection of vehicle mass line.
- 2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
- 3. Read down from this point to determine maximum speed.

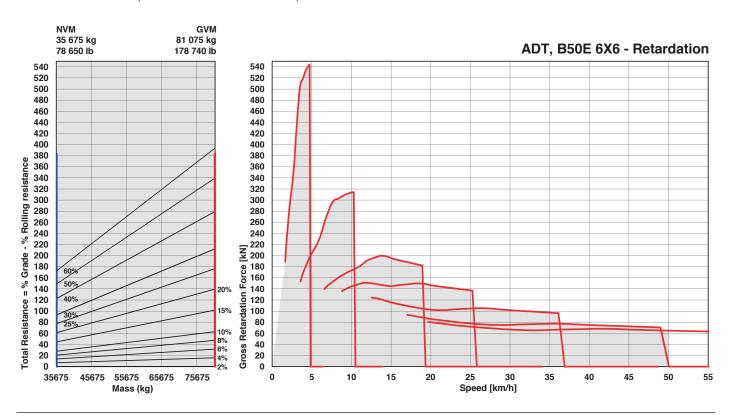



BASE BEGE	3/	840	BSOL	2/
	ENGINE			CAB (continued)
• •	Engine valve brake	•	•	Cooled/heated lunch box
	Dual element air cleaner with dust ejector valve			Manually adjusted mirrors
	Precleaner with automatic dust scavenging			Electrically adjusted and heated mirrors
	Water separator			Deluxe 10" colour LCD:
	Serpentine drive belt with automatic tensioner			Speedometer / Fuel gauge /
	Provision for fast fill			Transmission oil temperature gauge /
	Wet-sleeve cylinder liners			Engine coolant temperature gauge /
	THE SICOVE CYMPTON			LED function/warning indicators and
	COOLING			audible alarm / Transmission gear selection /
	Crankshaft mounted electronically controlled			Tachometer / Battery voltage / Hour meter /
	viscous fan drive			Odometer / Fuel consumption / Tip counter /
•	Fan guard			Trip timer / Trip distance / Metric/English units /
				Service codes/diagnostics
	PNEUMATIC SYSTEM	•		Backlit sealed switch module functions with:
• •	Engine-mounted compressor			Wiper control / Lights / Heated mirrors /
•	Air drier with heater			Retarding aggressiveness / Transfer case
•	Integral unloader valve			differential lock / Transmission gear hold /
				Dump-body tip limit / Automatic dump-body
	ELECTRICAL SYSTEM			tip settings / Airconditioner/ Heater controls /
• •	Battery disconnect			Preselected Speed Control
• •	Drive lights			
	LED Drive lights			DUMP BODY
• •	Air horn	•		Dump body mechanical locks (x2). Partially up
• •	Reverse alarm			and fully up
	White noise reverse alarm			Body liner
• •	LED reverse lights			Tailgate
• •	Rotating beacon		A	Body heater
• •	Pitch Roll Sensor		A	Less dump body and cylinders
• •	Halogen Artic reverse light		A	Low SG bin extensions
A	LED Artic reverse light			Bin pole lockout
	STEERING SYSTEM			OTHER
	Bi-directional ground-driven secondary steering	•		Automatic Traction Control (ATC)
	pump	•		Wet disc brakes
•	Ground-driven secondary steering pump			26.5 R 25 Radial Earthmover tyres
		•		29.5 R 25 Radial Earthmover tyres
	CAB			875/65 R 29 Radial Earthmover tyres
•	ROPS/FOPS certification	•		Remote grease banks
•	Tilt cab	A		Automatic greasing
•	Gas strut-supported door			Onboard weighing
•	I-Tip programmable dump-body tip settings		A	Load lights: stack
• •	HVAC Climate control system			Comfort ride suspension (front)
	AM/FM radio with Aux + USB			Comfort ride suspension (rear)
• •	Rear window guard			Reverse camera
• •	Wiper/washer with intermittent control			Hand rails
	Tilt and telescoping steering wheel			Cab peak
	Centre-mount air-suspension seat			High pressure hydraulic filter
A A	Halogen work lights			Fuel heater
A	LED work lights			Belly cover
A A	Rotating beacon: seat belt installation			Remote transmission filters
▲ ▲	Remote engine and machine isolation		•	Engine and transmission remote drain-gravity
•	Remote battery jump start			Engine and transmission remote drain-scavenge
•	Retractable 3-point seat belt			Window smash button
•	Foldaway trainer seat with retractable seat belt			High visibility mirrors
	12-volt power outlet			Fleetm@tic® Classic package for 2 years Electronic bonnet opening
	Cab utility bin (removable)			

Notes

Notes



All dimensions are shown in millimetres, unless otherwise stated between brackets. Under our policy of continuous improvement, we reserve the right to change technical data and design without prior notice. Photographs featured in this brochure may include optional equipment. Blu@dvantage™ is a trademark of Bell Equipment Co. (PTY) Ltd AdBlue® is a registered trademark of VDA.

BELL INTERNATIONAL: Tel: +27 (0)35-907 9431 E-mail: marketing@bellequipment.com Web: www.bellequipment.com

Tel: +61 (0)8-9355-2442

Tel: +33 (0)5-55-89-23-56

Tel: +49 (0)6631 / 91-13-0

Tel: +7-495-287-80-02

Tel: +27 (0)11-928-9700 Tel: +1 (704) 655 2802

Tel: +44 (0)1283-712862

