


BELL

CanePro

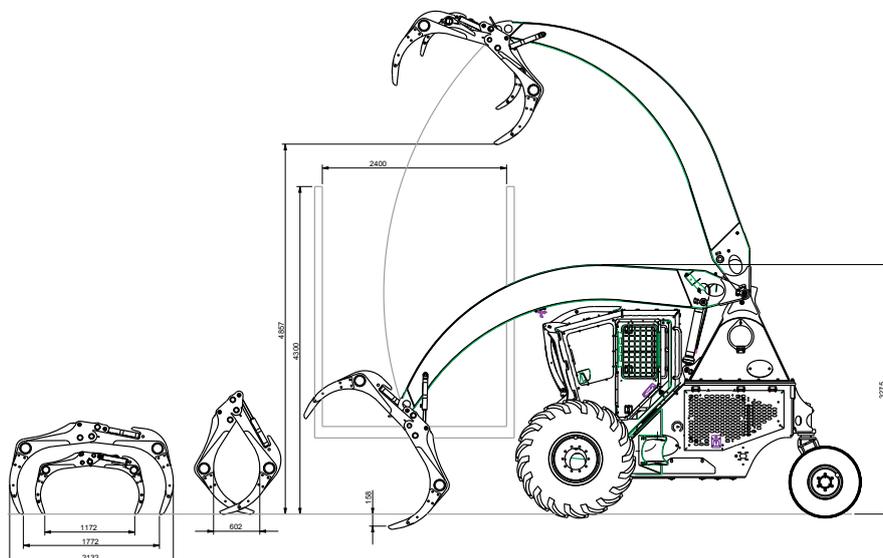

ENGINE	
JCB Diesel Max 444 T2 NA	63 kW (84 hp) @ 2 200 rpm
Peak torque	320 Nm (236 lb-ft) @ 1 200 rpm
4.4 ltr, 4-Cylinder, direct injection	
Mechanical engine - equipped with a dry element filtration system with secondary safety element	
Onboard electronic engine protection system	
Fuel tank capacity	150 litres
DRIVE SYSTEM	
Hydrostatic drive system - variable displacement, axial piston pump	
Two wheel drive	
Two speed drive motors	
Maximum speed	15 km/h (9.4 mph)
AXLES AND TYRES	
Rigid front axle	
Single rear castoring wheel	
Steering by differential drive - operator pedal controlled	
Tyre Size - Front	23.1 - 26
Tyre Size - Rear	500/50 - 17
BRAKES	
Hydrostatic dynamic braking system	
Spring applied, hydraulic release park brake	
CANE GRAPPLE	
Matriarch MC700	0.7 m ²
Tilt function with replaceable tines and tine tips	
HYDRAULIC SYSTEM	
Variable displacement axial piston pump	
Load sensing hydraulic system	
Single control valve with integrated flow sharing	
Onboard electronic hydraulic system protection system	
CANbus operator controls - low effort precision control	
Hydraulic tank capacity	100 litres
ELECTRICAL SYSTEM	
Single battery	12 volt
Alternator	14 volt 95 amp
LED worklights, reverse alarm & hooter	
OPERATOR STATION	
Good visibility all around the machine from the operator position	
Rubber mounted operator cab	
Polycarbonate glazed operator cab with standard HVAC system	
Ergonomic operator controls - single joystick primary control	
Instrumentation - LCD display for all systems parameters monitoring and diagnostics	
Fully adjustable operator seat with 4-point safety harness	
ROPS/FOPS/OPS compliant operator cab	
WEIGHTS AND DIMENSIONS	
Overall width	2 960 mm
Max lift height (measured under grab)	4 857 mm
Safe lifting load	1 750 kg
Operating weight	8 000 kg